


Noble Integrator

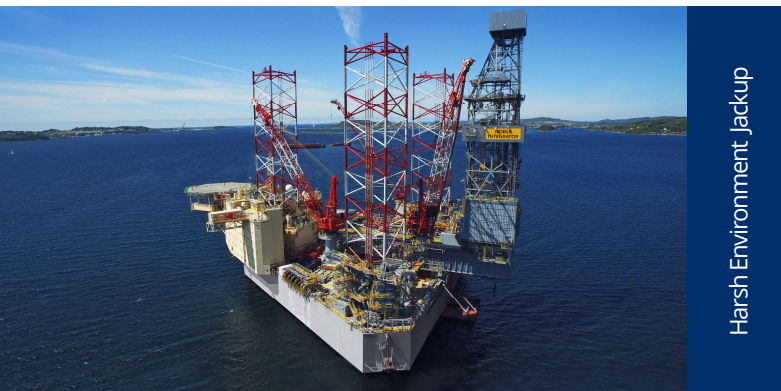

Harsh Environment Jackup

General description

The Noble Integrator ultra-harsh environment jack-up rig is designed for year-round operation in the North Sea. It benefits from a large drilling envelope of 100ft by 65ft. The Noble Integrator is designed and built to optimize drilling operations in all areas and can handle wellheads and Xmas trees offline, through the moon pool. Automated pipe handling equipment with offline capabilities enables the rig to build casing stands and drill pipe while drilling. Large deck space minimizes crane lifts, as a forklift can be used instead

General specifications

Design	GustoMSC CJ70-XLE
Year built/upgraded	2013
Year entered service	2013
Builder	Keppel FELS
Flag	Marshall Islands
Classification	DNV, 1A1 Self Elevating Drilling Unit(N), Battery(Safety), Drill(N), HELDK, Crane-offshore(N), PMS(M,D), ©
MODU Code	2009
Overall Length	291 ft x 345 ft
Operating Transit	26.2 ft
Depth	39.4 ft
Air Gap	24 m
Variable deck load	12,000 t (depending on SA)
Water depth	492 ft
Drilling depth	40,000 ft
Transit Speed	4 kn (towed)
Accommodation	150
Hook load	2MM lbs
Setback Capacity	2,270 kips

Cranes

Main cranes	3 x 100 t Molde OC3500LCE, 60 t @ 52.5 ft
X-Mas Tree / BOP	1 x 40 t NOV Trolley 1 x 150 t NOV Trolley

Applications

NORMS	Real Time Monitoring	Ops Performance Tool	Energy Efficiency Tool	H56
				RigFlow/Rig Pulse

These specifications are intended for general reference purposes only. Actual equipment may vary upon the contract situation and customer needs.

First Choice Offshore®



For more information please contact: noblemarketing@noblecorp.com

Storage capacity

Liquid mud	6,074 bbls
Base oil	3,318 bbls
Brine	4,887 bbls
Heavy Brine Accepted	Yes
Bulk cement	6,675 cuft
Bulk bentonite	4,450 cuft
Bulk barite	4,450 cuft
Sacks	5,000
Fuel	10,497 bbls
Drill water	21,039 bbls
Potable water	2,836 bbls?

Drilling equipment

Derrick	SSBN 1070 46 ft x 52 ft x 210 ft, 2,000 kips
Drawworks	1 x NOV SSGD-1070-50-82-10,5 , 4,288 kW continuous
Rotary Table	1 x NOV RST 495
Top Drive	1x NOV HPS-1000-AC, 92,120 ftlbs continuous
Tubular Handling	2 x NOV Hydraracker HR IV-ER 1 x Catwalk Shuttle 1 x Gantry Crane
Fingerboard capacity	72 STD 3.5" 128 STD 5 7/8" 60 STD 6 5/8" 10 STD DC 134 STD Csg
Mud Pumps	4 x NOV 14-P-220, 2,200 hp, 7,500 psi
Solids Control System	4 x NOV VSM Multisizer + 1 x Offline VSM
Iron Roughneck	2 x NOV ARN 270
Powered mousehole	Yes

Sub sea equipment

Diverter	1 x Drillquip KFDJ 500 – 30" ID – 2 x 14" OB lines
BOP stack	1 x Shaffer NXT 24 – 15K
Annular	1 x Shaffer 18 3/4" 10K
C&K manifold	NOV 15K

Power generation

Main power	4 x 2,925 kW , Wartsila, 900 rpm
Electrical power	4 x 2,284kW, AvK DIG 150, 6.6kV
Emergency power	Each main engine functions as emergency generator
Power from shore	No
SCR	Yes BLUNOX
Battery Unit	CES / Controlled Energy Storage

Noble Integrator



Noble Integrator Rig Crew

Jacking specifications

Leg Spacing	229.7 ft x 218.5 ft
# of Legs	3
Leg Length	675 ft (207 m)
Leg Spacing C-T-C	70 m (traverse), 66.6 m (long)
Jacking System	Keppel FELS, fixed type
Jacking Speed	0.45 m/min
Spud Can Diameter	22 m
Spud Can Height	7 m
Spud Can footing Area	380 m2 (fitted with 2 m skirt)
Bottom Jets	6 x
Fill / Dump Preload	8 hrs (fill) – 1 hrs (dump)

Other Systems

MPD	Compatible
Burner booms	2 x (PS/STB)
Dual activity	Offline standbuilding
Automation	Cyberbase, NOVOS, MMC, PIMS, Softspeed, DORS
Red Zone Management	Yes
On the Go	Yes
H56 Enabled	Yes
Data Infrastructure	Real time monitoring
Other	N/A

Real Time Data Provision

Drilling	VMS	NOVOS

These specifications are intended for general reference purposes only. Actual equipment may vary upon the contract situation and customer needs.

First Choice Offshore®



For more information please contact: noblemarketing@noblecorp.com

Unique Capabilities and Enhancements

Water depth capability	large water depth capability (492 ft) for harsh environment
Variable Deck Load	Large variable load capability (up to 12,000 t depending on SA) compared to other designs
Deck Area	jack-up with the largest deck and storage space compared to other jackup designs
Skidding Envelope	Very large cantilever skidding envelope with 110 ft cantilever reach
Mud System	4 x NOV 14-P-220, 2,200 hp

Cantilever specifications

Cantilever Envelope	110 ft x 73 ft
Cantilever Skidding Syst	X-y
Cantilever load	1,750 t (combined)
Hook load	910 t
Rotary load	910 t
Setback load	1,035 t (operational) 475 t (transit)
Texas Deck	150 t capacity

